


	150W 24V (UL	: 2.0	: 1/2
	HQLPV150/123/24/DE1		2018/6/25

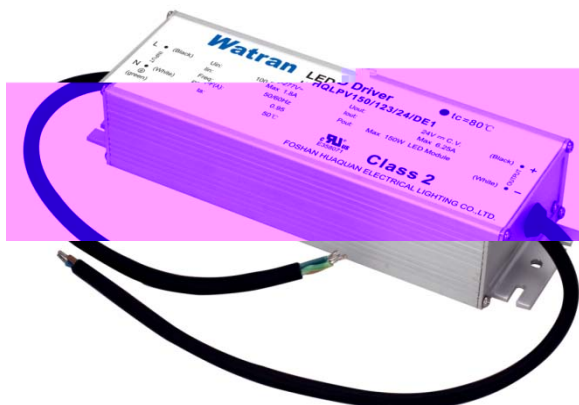


, 90 305VAC
 PFC
 88%
 IP67 /
 LED
 IEC GB
 / /
 3

 cRU[®]us SELV IP67

		: 10C 277VAC ,	: 9C 305VAC
		47 63Hz	
		PF 0.90 /277VAC(100%)	PF 0.95 /100VAC(100%)
(Typ.)		88%	: 277VAC, 100%
		1.80A/100VAC (100%)	
		60A Max. /277VAC	
		0.7mA at 277VAC	2mA at 277VAC
(THD)		THD 20%	
		1	
		6.25A Max.	
		24Vdc	
		± 5%	
		10% 100%	
/		5%	
		0.1S, 100VAC	0.05S, 277VAC
		110	
Ta)		-40 +50 100%	
Tc		80 100%	
		20 95%RH	
		-40 +80 10 95%RH	
		± 0.03% 0.50	
		10 500Hz 5G 12 /	X Y Z 72
		UL8750 ; GB19510 1/IEC61347-1 ;	GB19510 14/IEC61347-2-13
		I/P-O/P. 3 75KVAC 60S(100mA) I/P-FG 1. 875KVAC O/P-FG 0.5KVAC , 60S(
			10mA)
		I/P-O/P, I/P-FG, O/P-FG	100M at 500VDC/25 /70%RH
		FCC part 15 class B	
		: L-N 6KV L, N-G 6KV	
		50000	at Ta
		233x 74x 42.2mm(Lx W H),	
		1150 /	
		1. 277VAC	25
		2. EMC	EMC
		3.	

	150W 24V	(UL	: 2.0	: 2/2
	HQLPV150/123/24/DE1			2018/6/25

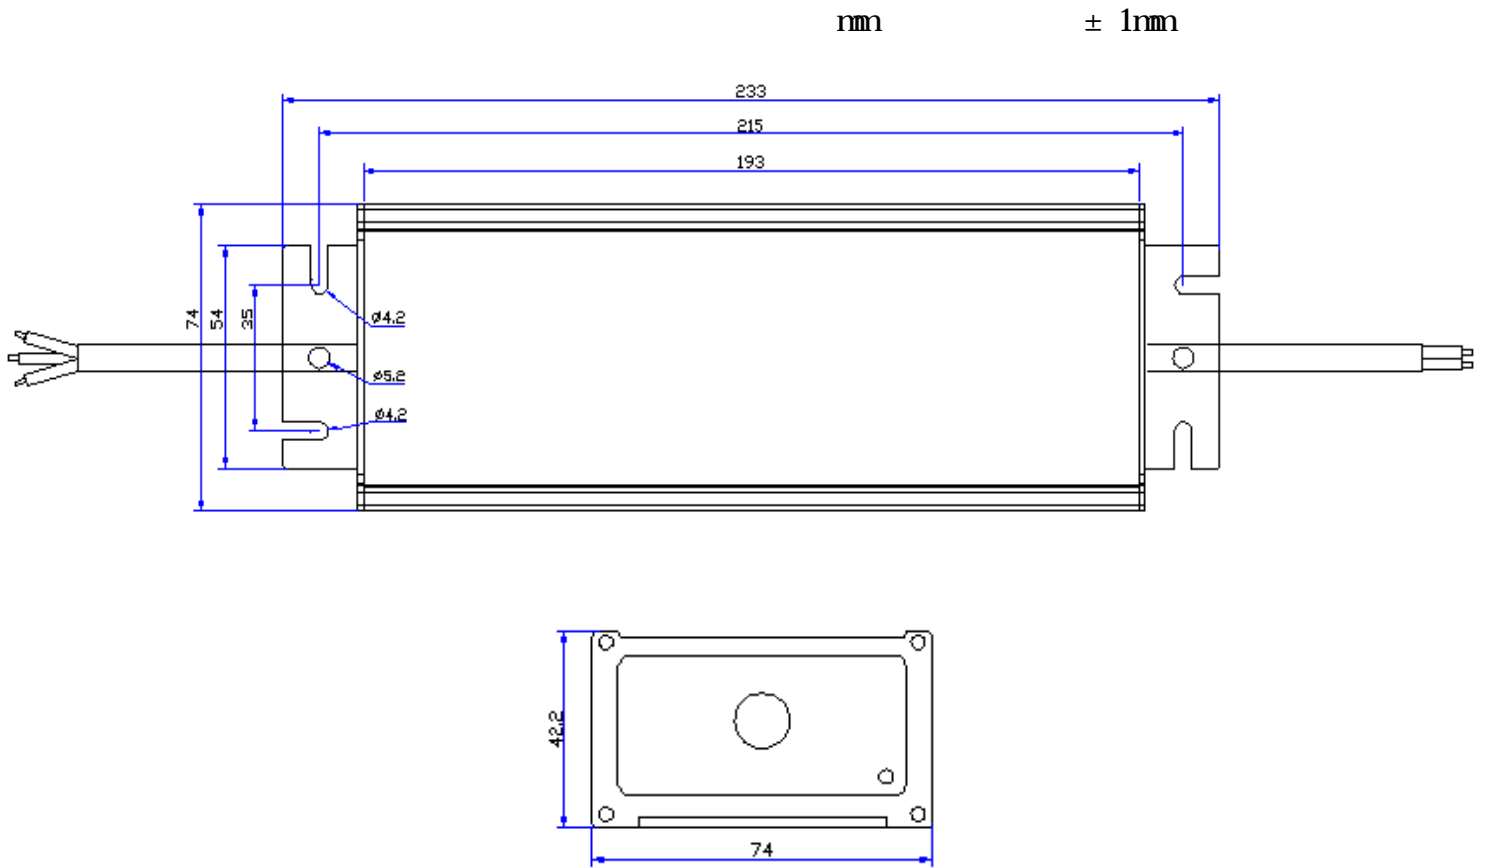

SJTW18AVG	3C 105	300V	/ /	200± 20mm
	30mm	5mm		
SJTW18AVG	2C 105	300V	/	200± 20mm
	30mm	5mm		

佛山市华全电气照明有限公司

中国广东省佛山市南海区西樵西岸开发区 (邮编: 528511)

电话: 0757-86802068 | 电邮: hql@hq-lighting.com

传真: 0757-86802163 | 网页: www.hq-lighting.com

此规格表内之技术数据及资料为佛山华全公司所拥有, 本公司保留作出更改权利而无需另行通知。